
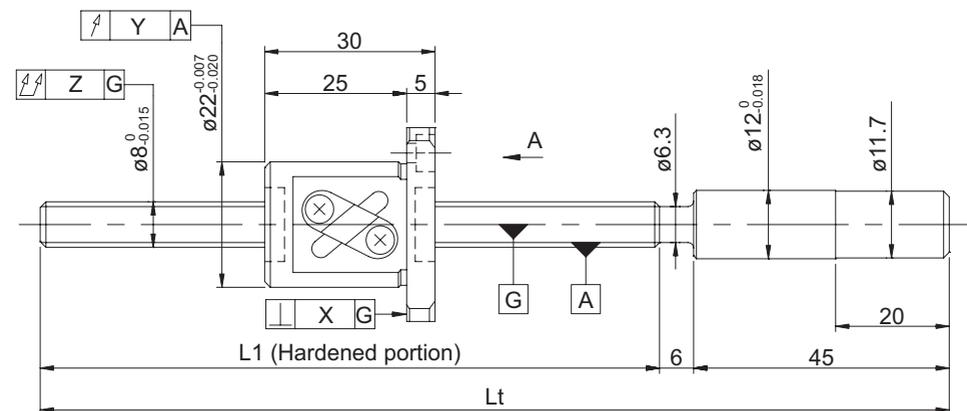


Screw shaft diameter ø8

● Ball screw specifications

Shaft diameter (mm) - Lead (mm)	8 - 4		
Number of circuits / Thread direction	2.5 turns 1 circuit / Right-hand		
Ball diameter (mm)	2.000		
Root diameter (mm)	6.3		
Series	GG	GE	
Basic dynamic load rating C (N)	2350		
Basic static load rating C0 (N)	3300		
Accuracy grade / Axial clearance symbol	C5 / S	C5 / F	C7 / M
Axial clearance (mm)	0	0.005 or less	0.030 or less
Preload torque (N·cm)	0.2 to 2.9	Up to 0.5	----
Spacer ball	None		
Recirculation system	Tube method		
Wiper	Felt wiper		
Lubricant	Alvania Grease S2		

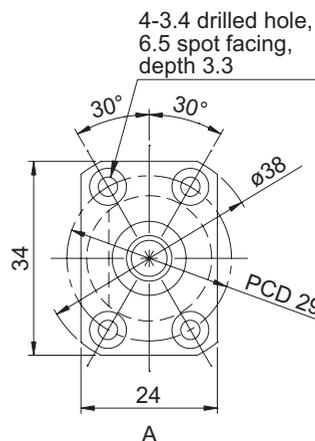

Model No. (Unfinished shaft ends)	Screw shaft length		Maximum stroke (L1 - nut length)	Lead accuracy		
	L1	Lt		$\pm E_c$	e_c	e_{300}
GG0804DS-BAFR-0215A	164	215	134	0.023	0.018	0.018
GG0804DS-BAFR-0340A	289	340	259			
GE0804DS-BAFR-0215A	164	215	134	0.05/300	----	----
GE0804DS-BAFR-0340A	289	340	259			


- Product with axial clearance of 0.005 or less (F) shown may be partially preloaded.
- Preload torque is a value before applying grease.

● Shaft end finish type

Standard precision ball screws are available with KURODA's recommended shaft end finish types for each size.

Other than KURODA's recommended shaft end finish types described below, additional machining including keyways, tapped holes, and D-cut processing are also available if requested. Please contact KURODA with your orders. Model examples for finished shaft ends are described below.

Model example: Unfinished shaft ends (See left figure) → Finished shaft ends
GG0804DS-BAFR-0340A → GG0804DS-BAFR-0340X0280-C5F

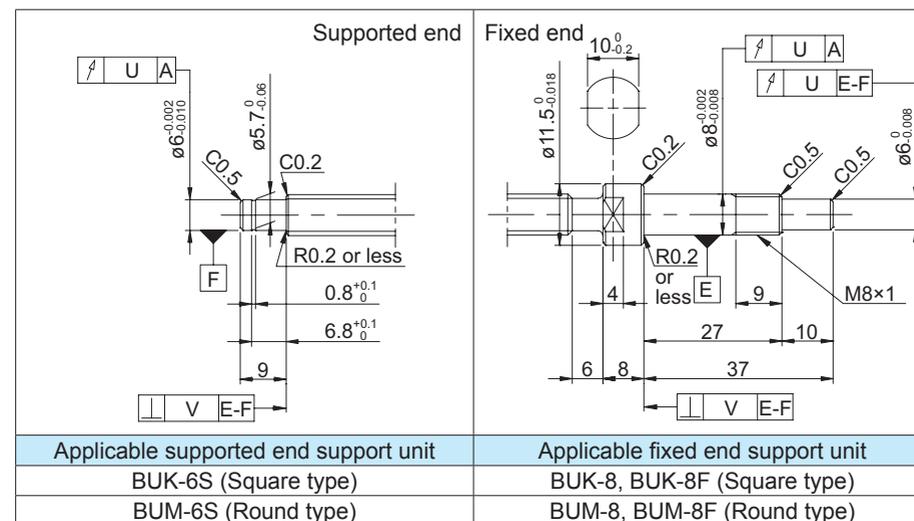

● Optional specifications

- Anticorrosive black coating (coating thickness: 1 to 2 μm) is available.

Accuracy of each part					Preload torque (N·cm)		Mass (kg)
X	Y	Z	U	V	Without clearance	With clearance	
0.010	0.012	0.065	0.010	0.005	0.2 to 2.9	Up to 0.5	0.18
		0.075					0.22
0.014	0.020	0.100	----	----	----	----	0.18
		0.100					0.22

- At the time of delivery, grease is inserted inside of the nut, with rust-preventive oil also applied. Before and during use, apply lubricant where appropriate.
- For models with lead accuracy grade of C3 or higher and unfinished shaft ends, consult KURODA.

Screw shaft diameter ø8