


주문생산 볼스크류 : 튜브방식 싱클 NUT C0~C10

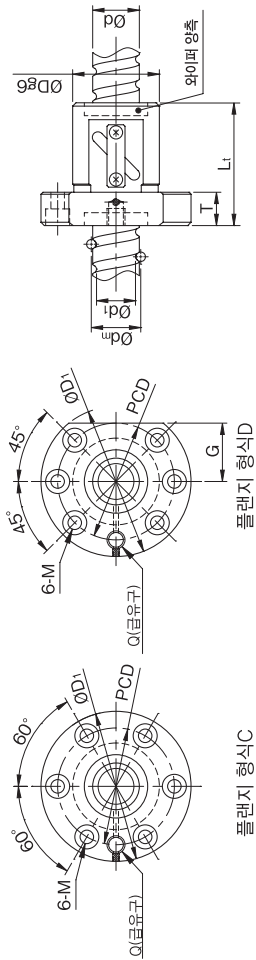

형식번호	나사축 외경 d	리드 L	볼크기 Db	곡경 d1	순환수 권X열	기본동 정격하중 C (N)	기본정 정격하중 Co (N)	*강성 Kms (N/mm)	NUT 치수										볼트치리			집량 NUT (kg)	나사축 외경 Ød1			
									외경 D	전장 Lt	외이퍼 중부	플랜지 두께 T	플랜지 외경 D1	볼랜지 형식	플랜지 치수					볼트치리						
															X	Y	A	B	G	Q	PCD			드릴 개원량	M	
GR6310DS-CAPR	63	10	6.3500	58.2	2.5x1	36800	114900	400	108	75	P	22	154	C	—	—	—	—	—	—	130	14	20	13	4.65	2.43
GR6310DS-DAPR	63	10	6.3500	58.2	2.5x1	36800	114900	400	108	75	P	22	154	D	—	—	—	—	—	—	130	14	20	13	4.42	2.43
GR6310ES-CAPR	63	10	6.3500	58.2	2.5x2	66600	229800	760	108	105	P	22	154	C	—	—	—	—	—	—	130	14	20	13	5.86	2.43
GR6310ES-DAPR	63	10	6.3500	58.2	2.5x2	66600	229800	760	108	105	P	22	154	D	—	—	—	—	—	—	130	14	20	13	5.63	2.43
GR6310FS-CAPR	63	10	6.3500	58.2	2.5x3	94400	344700	1100	108	135	P	22	154	C	—	—	—	—	—	—	130	14	20	13	7.07	2.43
GR6310FS-DAPR	63	10	6.3500	58.2	2.5x3	94400	344700	1100	108	135	P	22	154	D	—	—	—	—	—	—	130	14	20	13	6.84	2.43
GR6312DS-CAPR	63	12	7.9375	56.8	2.5x1	48700	139000	400	115	83	P	22	161	C	—	—	—	—	—	—	137	14	20	13	5.72	2.43
GR6312DS-DAPR	63	12	7.9375	56.8	2.5x1	48700	139000	400	115	83	P	22	161	D	—	—	—	—	—	—	137	14	20	13	5.48	2.43
GR6312ES-CAPR	63	12	7.9375	56.8	2.5x2	88500	278000	760	115	119	P	22	161	C	—	—	—	—	—	—	137	14	20	13	7.46	2.43
GR6312ES-DAPR	63	12	7.9375	56.8	2.5x2	88500	278000	760	115	119	P	22	161	D	—	—	—	—	—	—	137	14	20	13	7.22	2.43
GR6312FS-CAPR	63	12	7.9375	56.8	2.5x3	125500	417000	1100	115	155	P	22	161	C	—	—	—	—	—	—	137	14	20	13	9.20	2.43
GR6312FS-DAPR	63	12	7.9375	56.8	2.5x3	125500	417000	1100	115	155	P	22	161	D	—	—	—	—	—	—	137	14	20	13	8.96	2.43
GR6316DS-CAPR	63	16	9.5250	55.6	2.5x1	80300	231000	450	122	115	P	28	180	C	—	—	—	—	—	—	150	18	26	17.5	9.53	2.43
GR6316DS-DAPR	63	16	9.5250	55.6	2.5x1	80300	231000	450	122	115	P	28	180	D	—	—	—	—	—	—	150	18	26	17.5	9.16	2.43
GR6316ES-CAPR	63	16	9.5250	55.6	2.5x2	145800	462000	850	122	163	P	28	180	C	—	—	—	—	—	—	150	18	26	17.5	12.25	2.43
GR6316ES-DAPR	63	16	9.5250	55.6	2.5x2	145800	462000	850	122	163	P	28	180	D	—	—	—	—	—	—	150	18	26	17.5	11.88	2.43
GR6320DS-CAPR	63	20	9.5250	55.6	2.5x1	80300	231000	460	122	115	P	28	180	C	—	—	—	—	—	—	150	18	26	17.5	9.53	2.43
GR6320DS-DAPR	63	20	9.5250	55.6	2.5x1	80300	231000	460	122	115	P	28	180	D	—	—	—	—	—	—	150	18	26	17.5	9.16	2.43
GR6320ES-CAPR	63	20	9.5250	55.6	2.5x2	145800	462000	860	122	175	P	28	180	C	—	—	—	—	—	—	150	18	26	17.5	12.93	2.43
GR6320ES-DAPR	63	20	9.5250	55.6	2.5x2	145800	462000	860	122	175	P	28	180	D	—	—	—	—	—	—	150	18	26	17.5	12.57	2.43

주) 표 중 *표의 강성은 기본동정격하중(C)의 30%에 해당하는 축방향하중이 나사축과 강구간에 절밀의 탄성변위량으로 부터 강성시험 결과에 근거한 실용치로서 기재되어 있습니다.

· 외이퍼의 종류 P: 플라스틱