


주문생산 볼스크류 : 튜브방식 싱클 NUT C0~C10

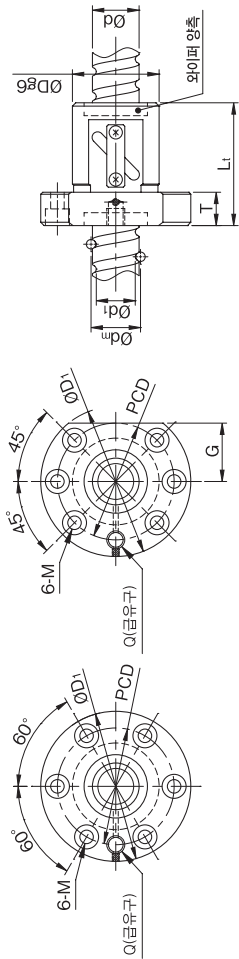

플랜지 형식C

플랜지 형식D

(단위 : mm)

형식번호	나사축 외경 d	리드 L	볼크기 Do	과경 d1	순환식 관원X	기본동 정격하중 C (N)	기본정 정격하중 Co (N)	* 강성 Kns (N/mm)	NUT 치수										볼트자리		질량					
									외경 D	전장 Lt	외이퍼 총류 T	플랜지 외경 D1	플랜지 형식	플랜지 치수												
														X	Y	A	B	G	Q	PCD		드릴 지름	M			
GRA012ES-CAPR	100	12	7.9375	93.8	2.5x2	109450	451800	1130	160	123	P	28	220	C	—	—	—	—	—	Rc1/8	188	18	26	17.5	14.07	6.13
GRA012ES-DAPR	100	12	7.9375	93.8	2.5x2	109450	451800	1130	160	123	P	28	220	C	—	—	—	—	—	Rc1/8	188	18	26	17.5	13.46	6.13
GRA012FS-CAPR	100	12	7.9375	93.8	2.5x3	155000	677700	1630	159	159	P	28	220	C	—	—	—	—	—	Rc1/8	188	18	26	17.5	17.05	6.13
GRA012FS-DAPR	100	12	7.9375	93.8	2.5x3	155000	677700	1630	159	159	P	28	220	D	—	—	—	—	—	Rc1/8	188	18	26	17.5	16.43	6.13
GRA016ES-CAPR	100	16	9.5250	92.6	2.5x2	180000	739000	1250	170	165	P	32	243	C	—	—	—	—	—	Rc1/8	205	22	32	21.5	22.44	6.13
GRA016ES-DAPR	100	16	9.5250	92.6	2.5x2	180000	739000	1250	170	165	P	32	243	D	—	—	—	—	—	Rc1/8	205	22	32	21.5	21.60	6.13
GRA016FS-CAPR	100	16	9.5250	92.6	2.5x3	255000	1108500	1800	170	213	P	32	243	C	—	—	—	—	—	Rc1/8	205	22	32	21.5	27.25	6.13
GRA016FS-DAPR	100	16	9.5250	92.6	2.5x3	255000	1108500	1800	170	213	P	32	243	D	—	—	—	—	—	Rc1/8	205	22	32	21.5	26.41	6.13
GRA020ES-CAPR	100	20	9.5250	92.6	2.5x2	180000	739000	1250	170	177	P	32	243	C	—	—	—	—	—	Rc1/8	205	22	32	21.5	23.64	6.13
GRA020ES-DAPR	100	20	9.5250	92.6	2.5x2	180000	739000	1250	170	177	P	32	243	D	—	—	—	—	—	Rc1/8	205	22	32	21.5	22.80	6.13
GRA020FS-CAPR	100	20	9.5250	92.6	2.5x3	255000	1108500	1910	170	237	P	32	243	C	—	—	—	—	—	Rc1/8	205	22	32	21.5	29.65	6.13
GRA020FS-DAPR	100	20	9.5250	92.6	2.5x3	255000	1108500	1910	170	237	P	32	243	D	—	—	—	—	—	Rc1/8	205	22	32	21.5	28.81	6.13
GRCS16ES-CAPR	125	16	9.5250	117.6	2.5x2	200400	946900	1520	200	169	P	36	290	C	—	—	—	—	—	Rc1/8	243	26	39	25.5	31.70	9.57
GRCS16ES-DAPR	125	16	9.5250	117.6	2.5x2	200400	946900	1520	200	169	P	36	290	D	—	—	—	—	—	Rc1/8	243	26	39	25.5	30.38	9.57
GRCS16FS-CAPR	125	16	9.5250	117.6	2.5x3	284100	1420400	2190	200	217	P	36	290	C	—	—	—	—	—	Rc1/8	243	26	39	25.5	37.94	9.57
GRCS16FS-DAPR	125	16	9.5250	117.6	2.5x3	284100	1420400	2190	200	217	P	36	290	D	—	—	—	—	—	Rc1/8	243	26	39	25.5	36.62	9.57
GRCS20ES-CAPR	125	20	9.5250	117.6	2.5x2	200400	946900	1520	200	181	P	36	290	C	—	—	—	—	—	Rc1/8	243	26	39	25.5	33.26	9.57
GRCS20ES-DAPR	125	20	9.5250	117.6	2.5x2	200400	946900	1520	200	181	P	36	290	D	—	—	—	—	—	Rc1/8	243	26	39	25.5	31.94	9.57
GRCS20FS-CAPR	125	20	9.5250	117.6	2.5x3	284100	1420400	2190	200	241	P	36	290	C	—	—	—	—	—	Rc1/8	243	26	39	25.5	41.06	9.57
GRCS20FS-DAPR	125	20	9.5250	117.6	2.5x3	284100	1420400	2190	200	241	P	36	290	D	—	—	—	—	—	Rc1/8	243	26	39	25.5	39.74	9.57

주) a) 중 *표의 강성은, 기본동정격하중(C)의 30%에 해당하는 축방향하중이 나사축과 강구간에 결렬때의 탄성변위량으로 부터 강성시험 결과에 근거한 실용치로서 기재되어 있습니다.

· 외이퍼의 종류 P: 플러스형