
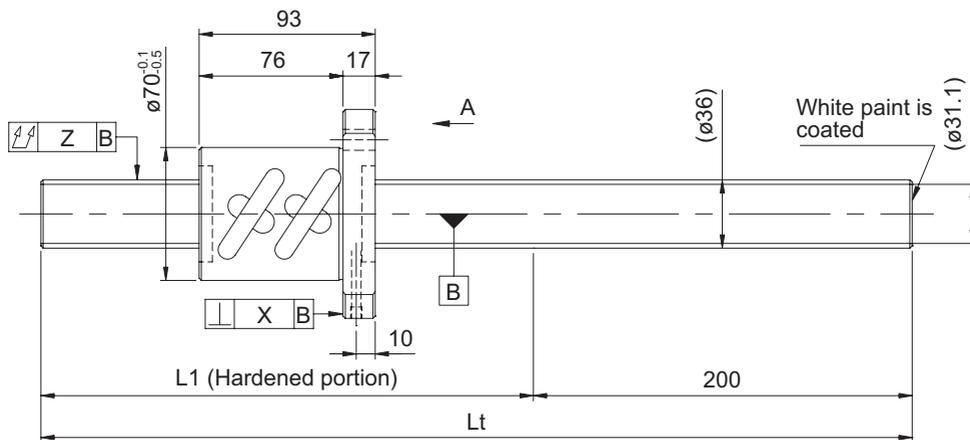


GY series (Accuracy grade C10)

Ball screw specifications

Shaft diameter (mm) - Lead (mm)	36 - 10
Number of circuits / Thread direction	2.5 turns 2 circuits / Right-hand
Ball diameter (mm)	6.350
Root diameter (mm)	31.1
Series	GY
Basic dynamic load rating C (N)	35100
Basic static load rating C0 (N)	98200
Accuracy grade / Axial clearance symbol	C10 / Y
Axial clearance (mm)	0.200 or less
Preload torque (N·cm)	----
Recirculation system	Tube method
Wiper	Brush wiper
Lubricant	Alvania Grease S2
Phosphate coating	Screw shaft, nut

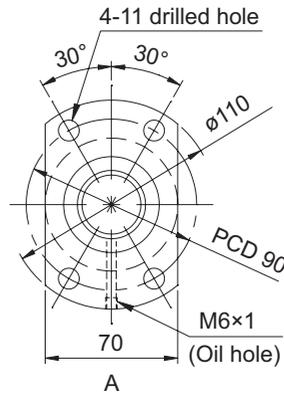

Model No. (Unfinished shaft ends)	L1	Lt	Maximum stroke (L1 - nut length)
GY3610ES-HUBR-1000A	800	1000	707
GY3610ES-HUBR-2000A	1800	2000	1707
GY3610ES-HUBR-3000A	2800	3000	2707

• At the time of delivery, grease is inserted inside of the nut, with rust-preventive oil also applied. Before and during use, apply lubricant where appropriate.

Screw shaft diameter $\phi 36$, Lead 10 (Round nut)


Shaft end finish type

Standard rolled ball screws are available with KURODA's recommended shaft end finish types for each size.

Other than KURODA's recommended shaft end finish types described below, additional machining including keyways, tapped holes, and D-cut processing are also available if requested. Please contact KURODA with your orders. Model examples for finished shaft ends are described below.

Model example: Unfinished shaft ends (See left figure) → Finished shaft ends

GY3610ES-HUBR-3000A → GY3610ES-HUBR-2970X2830-CAY
 ↳ Thread length
 ↳ Overall screw shaft length

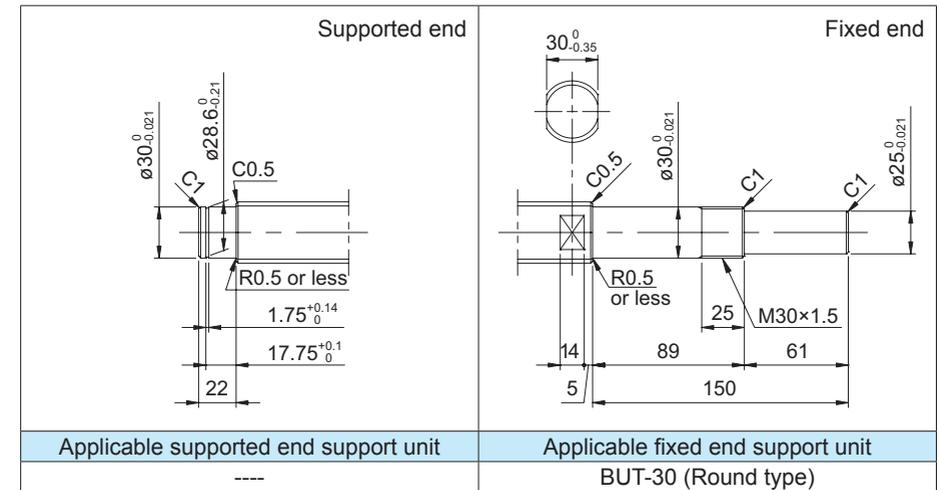

Optional specifications

• Anticorrosive black coating (coating thickness: 1 to 2 μm) is available.

Lead accuracy	Accuracy of each part		Mass (kg)
	X	Z	
0.21/300	---	0.120	10.28
		0.240	18.25
		0.640	26.22